



PanoVu Mini Series Camera Introduction

Front-end Department, Oversea Presales
Team

Traditional Indoor Solution

Many IP, **Hard** to
manage



**Multiple Cameras
Solution**



**Difficult
Installation**

High
Device cost
Human cost


Traditional Indoor Solution

Details

Limited
coverage



Panorama
Distortion

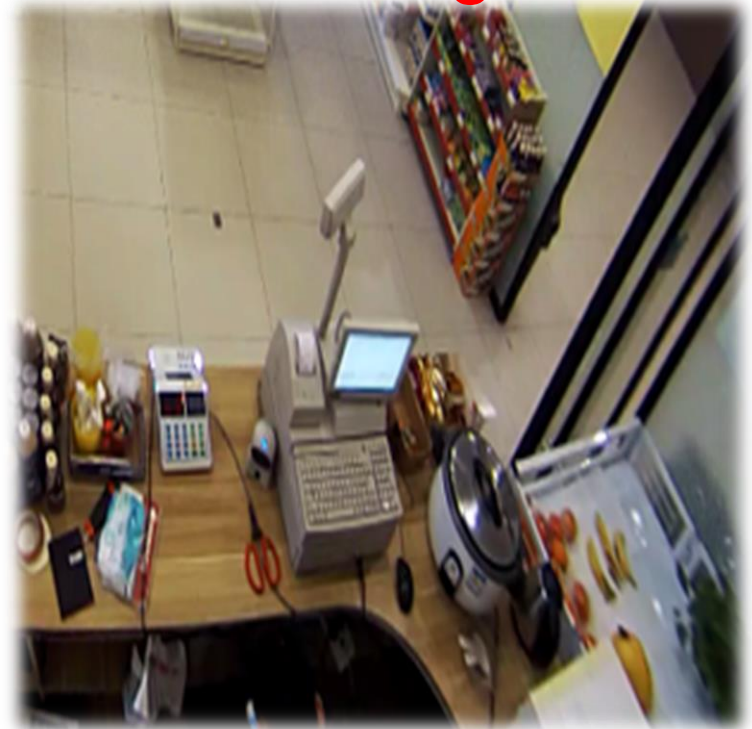

 Panorama + Details ?

PanoVu Mini Series (3+1)

Indo
or

3 Fixed lens +
1 PTZ



DS-2PT3326IZ-DE3(2.8-12mm)(2mm)

IR distance 10m

Fixed lens HFOV : single lens 128.5°

PTZ lens angle of view : pan 350° ; tilt 0°-90°

Product Features

High Edge Definition

Multiple lenses form images independently to ensure the high edge definition.

Low Image Distortion

Multiple lenses and sensors form images independently so that images have lower distortion and show more details.

Ultra Wide FOV:

FOV up to 360°

Clear Details:

PTZ zooms out to see more details.



All in One design, Panoramic Image



Single power
Single cable
Single IP

4-ch 1080P live view
Simultaneously

360° full
coverage

Panorama & Details

Live view Playback Picture Configuration admin Help Logout

PTZ

Navigation and PTZ controls including directional arrows, zoom in/out, pan, and a zoom level slider set to 4.

- 1 Preset 1
- 2 Preset 2
- 3 Preset 3
- 4 Preset 4
- 5 Preset 5
- 6 Preset 6
- 7 Preset 7
- 8 Preset 8
- 9 Preset 9
- 10 Preset 10
- 11 Preset 11

Bottom status bar with icons for grid, zoom, and other camera functions.

Small Size



Compared with **iPhone**
7 Plus

Cost-effective Product



1 device & **1** IP & **1** Monitor

Save cost of cameras,
lens, wiring, power,
storage, displaying, etc.

In addition, make
installation wiring more
easier and reduce cost
of vertical pole, labor
and follow-up
maintenance.

Application Set



+



K/I Series NVR



**IE
iVMS 4200
Third-party
platform**

Installation Guide

Indoor 3 Fixed lens + 1 PTZ :

Celling mount (in the center of the ceiling)


Pendant mount



Installation height: 3-

5m

Installation Guide

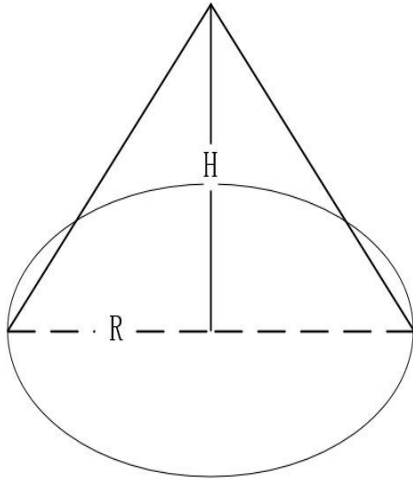


Height(m)	3	4	5
R (m) (Face)	5	4	3
R (m) (Behavior)	15	14.5	14

Pendant mount
bracket
DS-1271ZJ-PT10

Wall mount
bracket
DS-1294ZJ-TRL

Application Scenario

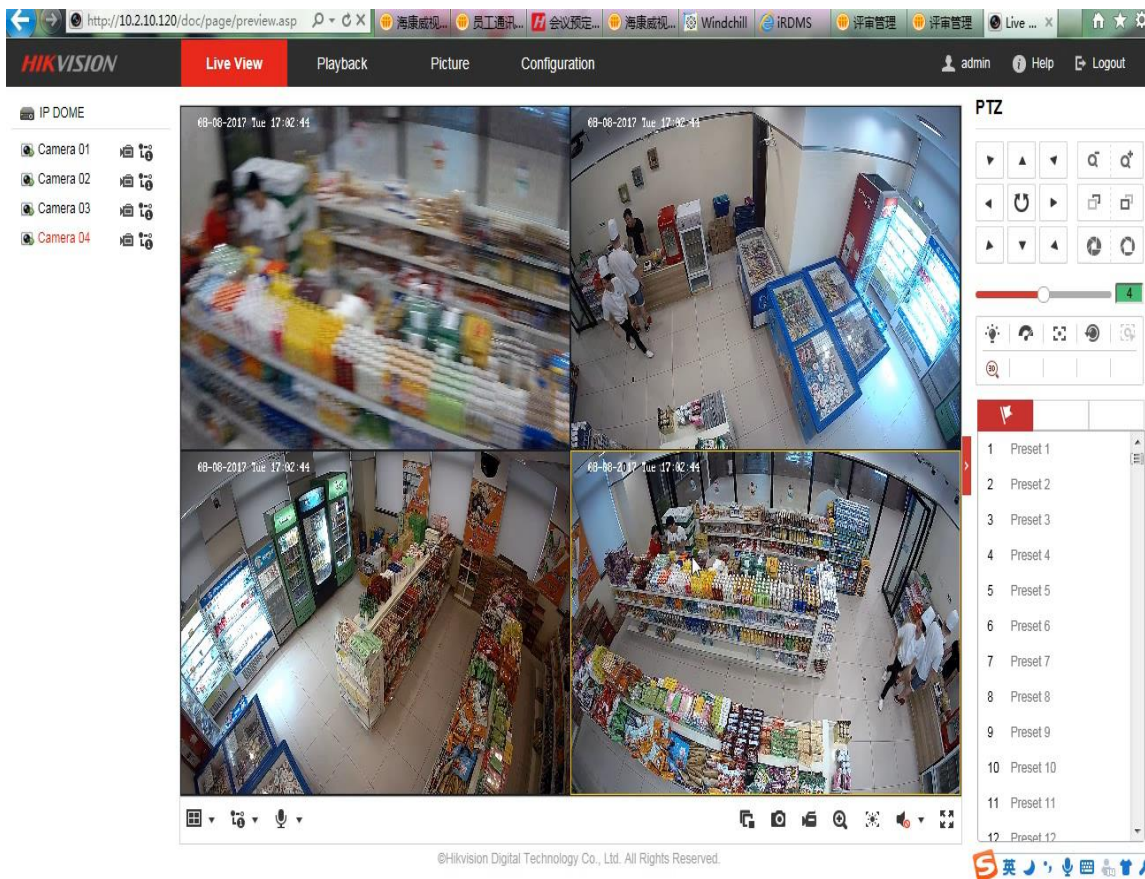

**3 Fixed lenses +
1 PTZ**

Suitable for **indoor
panoramic**

surveillance:

Retail, meeting
room, classroom,
office, etc.

Application Scenario



3 Fixed lenses +
1 PTZ

Excellent **night**
effect

PanoVu Mini Series (1+1)

Indoor

1 Fixed lens + 1
PTZ



DS-2PT3122IZ-DE3(2.8-12mm)(2mm)

IR distance 10m

Fixed lens angle of view : horizontal 128.5°

PTZ lens angle of view : pan 350° ; tilt 0°-
90°

Installation:

Celling mount & Wall mount

Visible lens direction

Application Scenario

Suitable for **indoor multi-spot**

surveillance:

Retail + cashier desk, classroom +
platform



1 Fixed lens +
1 PTZ




云台



PanoVu Mini Series (Out door)

Coming Soon

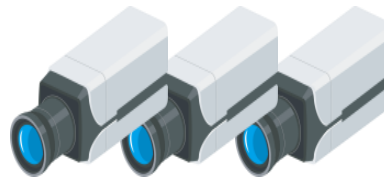

2017.10
Sample

DS-
2PT5326IZ-
DE

Non-
Stitched

- 3*2MP (4mm) non-stitched video, 2MP PTZ (5-50mm)
- Horizontal 270° FOV
- Adjustable fixed lenses in pan (0-180°) and tilt (15-55°)
- One IP, four streams
- Perfect for corner mount with easier installation
- IP66 (Outdoor)



Thanks