

AE-MD5043-SD Series Mobile Video Recorder

AE-MD5043-SD series DVR is designed for vehicle video and audio management using embedded Linux operating system. It supports the mixed access of HDTVI, AHD and CVBS cameras in HIK-wiring-sequence, with video and audio encoding/decoding, 4G wireless network transmission, satellite positioning, data secure storage, alarm triggering and other functions. It also provides channel selection and coding scheme, which especially suitable for the video and audio monitoring needs for scenes like taxis, muck trucks, logistics vehicles etc. To meet the needs of long - time video recording, it adopts dual SD card for storage.



Application

The anti-corrosion performance level of AE-MD5043-SD series DVR is standard. It is suitable for regular scenarios only and might be damaged when exposed to corrosive environment.

Description of anti-corrosion performance level:

Anti-corrosion Performance	Application
Professional	Coastal areas, wharfs, ports, ships and chemical factories, etc.
High Areas exposed to acid rain; areas over 1.24 miles (1 km) away from t	
Standard	Regular environment with little corrosion exposure

Key Feature

- Access of 4 HD TVI cameras with up to 1080p resolution.
- Support 1 IPC (please contact the product manager for model selection)
- 2 SD cards accessible. Up to 512 GB capacity for each.
- Support recording backup on redundant SD cards.
- User-friendly GUI providing easy and flexible operations.
- Built-in 4G module and Wi-Fi module providing flexible data transmission solutions.* Only for product models that support 4G& Wi-Fi
- Built-in GPS module precisely positioning the vehicle via the satellite and recording the location information in the video stream.
- Information collection interfaces collecting driving information such as left/right turn, braking, reversing, etc.
- Specialized aviation connectors ensuring signal stability.
- Shutdown delay (0 h to 6 h) and 24-hour scheduled startup/shutdown.
- Build-in super-capacitor prevents the mobile DVR from damage caused by sudden power outage.
- Wide-range power input (+9 VDC to +32 VDC).
- Power-off protection prevents key data loss.
- Aluminum die-cast chassis with no fan design well adaptable to working environment.
- Software-based firewall supported.
- Support accessing via WEB browser.





Specification

Model		AE-MD5043-SD		
	Analog Camera	4-ch HIK wiring sequence analog camera, Max. 1080P		
Video/Audio Input	IPC Camera	Support 1 IPC (please contact the product manager for model selection)		
	Two-way Audio	1, integrated in EXT.DEV interface		
Video/Audio Output	Video Output	Main output: 1, integrated in EXT.DEV interface		
Tides//tadio Galpat	Audio Output	1		
	Video Compression	H.264/H.265		
	Encoding	Main stream: 1080P/720P/WD1/4CIF		
	Resolution	Sub-stream: 720P/WD1/4CIF/2CIF/CIF ■ PAL: 1 to 25fps@1080P; NTSC: 1 to 30 fps@1080P;		
Encoding/Decoding	Frame Rate	• PAL: 1 to 25 fps@720P; NTSC: 1 to 30 fps@720P;		
Parameters	Audio Compression	G.711a/G.711u/G.722.1/G.726		
	Stream Type	Video, video & audio		
	Audio Bitrate	16 Kbps		
	Dual Stream	Supported		
Ch	CD Count	2 × SD card, up to 512 GB (not for baseline. Note the SD card capacity		
Storage	SD Card	when ordering)		
Wireless Network	4G Dialing			



	GNSS (Global	
Positioning	Navigation Satellite System)	GPS (Global Positioning System) & GLONASS, $1 \times FAKRA$ antenna
	Network Interface	Rear panel :1 ×10M/100M RJ45
	Serial Port	$1 \times RS-232$, $1 \times RS-485$ (integrated in EXT.DEV interface)
External Interface	USB Interface	Front panel: 1 × USB 2.0
External interface	Sensor-in	4 high/low level signal inputs
	Alarm Input	4 high/low level signal inputs, 1 pulse signal input, 1 BUTTON input
	Alarm Output	2 relay signal outputs
	Operating Method	Mouse, IR remote control, Web control, Touch screen
	G-sensor	Built-in
	Power Supply	+9 to +32 VDC
	Consumption	 Standby: ≤ 0.5 W Full load: ≤ 45 W Note: Without peripheral and storage media ≤ 20 W
	Working Temperature	-20 °C to +60 °C (-4 °F to +140°F)
General	Working Humidity	10% to 95%
General	Device Dimension $(W \times D \times H)$	184 × 134.4 × 44 mm (7.2 × 5.29 × 1.73 inch)
	Package Dimension (W × D × H)	250×210×160mm (9.84 ×8.27 ×6.30 inch)
	Device Weight (Without Storage Media)	0.65 kg (1.43 lb)
	Package Weight (Without Storage Media)	1.382 kg (3.047 lb)

Available Model

AE-MD5043-SD (supports none communication module)

AE-MD5043-SD/GLF, (supports 4G dialing)


AE-MD5043-SD/GLF/WI58, (supports 4G dialing, 5.8G Wi-Fi)

AE-MD5043-SD/GLF/WI, (supports 4G dialing, 2.4G Wi-Fi)




Physical Interface

■ Front Panel

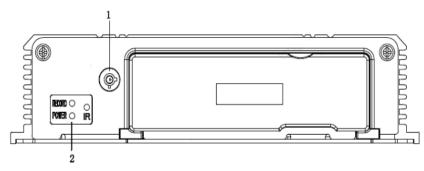


No.	Name	No.	Name
	Front panel lock	2	PWR: Power indicator
1			REC: Record indicator
			IR: Infrared receiving Indicator



No.	Name	No.	Name
1	USB 2.0 interface	3	SD card slot
2	SD card slot	4	SIM card slot

Rear Panel

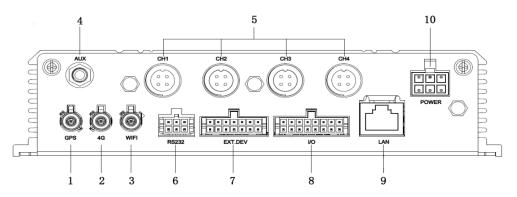


No.	Name	No.	Name		
1	GNSS antenna interface	6	RS-232 interface		
2	4G dialing antenna interface		RS-485 communication interface, two-way audio interface and CVBS video output		
3	Wi-Fi 2.4G&5.8G antenna interface		Alarm in, alarm out and sensor-in		
4	Wi-Fi 5.8G antenna interface		Network interface		
5	Analog camera input		Power supply		



Packing List

Description	Quantity	Picture	Note
Fuse	1		
Power cord	1		
Key	1		
Alarm line	1		
Extension cable	1		
3G/4G antenna	1		For GLF module.
Wi-Fi antenna (2.4G&5.8G)	1		For WI&WI58 module.
Wi-Fi antenna (5.8G)	1		For WI58 module.
GPS antenna	1		For module with GPS module.

Peripheral Connection

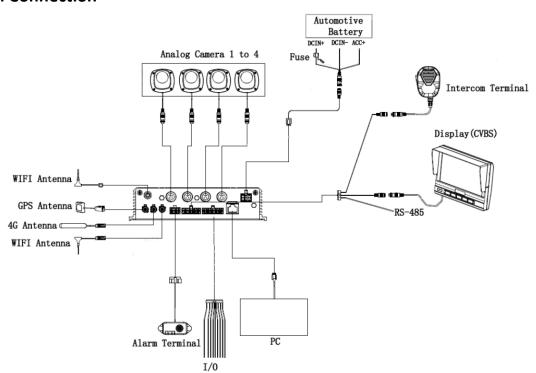



Distributed by

HIKVISION°

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400

sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T+662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com **Hikvision Russia** T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com