


**Key Feature**

- Modular door station Nametag unit, needs mounting bracket
- 6 call buttons, including 4 button covers, IP65
- Dial the resident at one touch
- Backlight compensation
- Easy to and extend

**Typical Application**

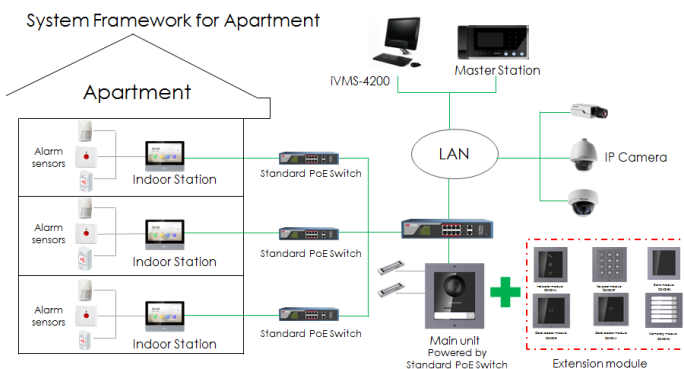

**Approval**

CE-EMC	a. EN 55032:2015 b. EN 61000-3-2:2014 c. EN 61000-3-3:2013 d. EN 50130-4:2011 +A1:2014
CE-LVD	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
CB	IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
FCC-SDOC	47 CFR Part 15, Subpart B
C-	AS/NZS CISPR 32:2015

TICK(EMC)	
UL	UL 60950-1 & CAN/CSA C22.2 No. 60950-1-07, Information Technology Equipment – Safety – Part 1: General Requirements
ROHS	2011/65/EU
REACH	Regulation (EC) No 1907/2006
WEEE	2012/19/EU


**Specification**

System parameters	
Processor	Embedded MCU Processor
Interfaces	
RS-485	2 (1 input, 1 output)
Power interface	1
General	
Power consumption	≤ 2 W
Button	6
Installation	Flush mounting, surface mounting
Weight	With package: 438 g Without package: 190 g
Protective level	IP65
Working temperature	-40° C to +55° C (-40° F to 131° F)
Working humidity	10% to 95%
Dimension	98.2 mm × 100.2 mm × 33.7 mm (3.87" × 3.95" × 1.33")
Power supply	12 VDC (powered for other module)

## Available Model


DS-KD-KK

## Appearance and Interfaces

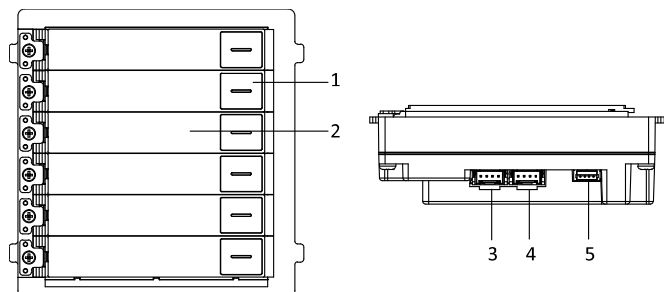

No.	Description
1	Call button
2	Nametag
3	Module-connecting interface (output)
4	Module-connecting interface (input)
5	Debugging port

## Dimension

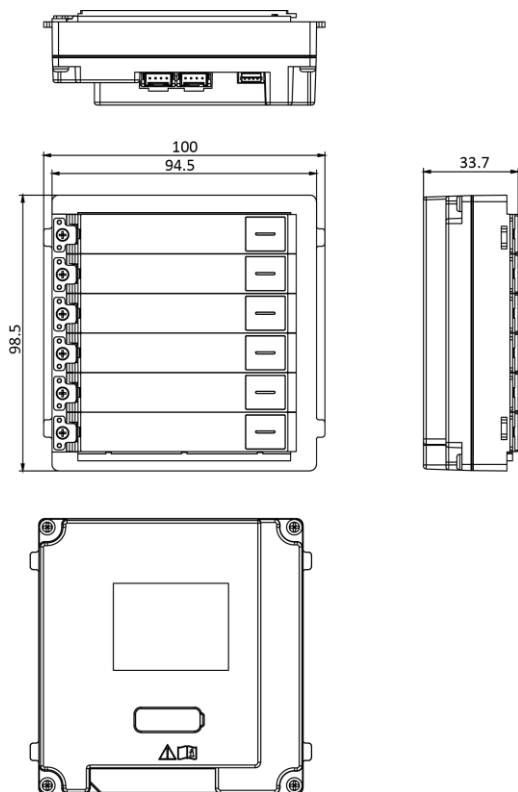

Unit: mm

## Accessory

### Optional



DS-KD-ACF1/Plastic



DS-KD-ACF2/Plastic



DS-KD-ACF3/Plastic



DS-KD-ACW1



DS-KD-ACW2



DS-KD-ACW3

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

